

PROBLEM Spring-05-F.1:

In each case, make a sketch of the plot that MATLAB will produce. Label your sketches carefully.

Hint: Convert the MATLAB code to an equivalent mathematical function or operation to make the sketch.

(a) `ww = -pi:pi/200:pi;`
`[HH,ww] = freekz([7,-7], [1,0.9], ww);`
`plot(ww, abs(HH))`

(b) `tt = 1e-12 + (-100:100); %-avoid divide by zero`
`ht = sin(pi*tt/25)./tt/10;`
`plot(tt, ht)`

(c) `xn = [1,zeros(1,4)];`
`yn = filter([1,1], [1,-0.9], xn);`
`stem(0:4,yn)`

PROBLEM Spring-05-F.2:

In each of the following cases, determine the (inverse or forward) Fourier transform. The following Fourier transform pair will be needed for some parts:

$$x(t) = e^{-t^2} \longleftrightarrow X(j\omega) = \sqrt{\pi} e^{-\omega^2/4}$$

Give your answer as a plot, or a simple formula.

(a) Find $x(t)$ when $X(j\omega) = -j10 \sin(4\omega)$.

(b) Find $S(j\omega)$ when $s(t) = u(t + 1)u(6 - t)$.

(c) Find $R(j\omega)$ when $r(t) = e^{-t^2/4}$.

(d) Find $H(j\omega)$ when $h(t) = \left\{ \frac{d}{dt} e^{-t^2} \right\} \delta(t - 5)$.

(e) The convolution $y(t) = \frac{\sin(11\pi t)}{\pi t} * \left\{ \sum_{n=-\infty}^{\infty} \delta(t - n/7) \right\}$ evaluates to a constant, i.e., $y(t) = y_0$.
Find the value of y_0 .

PROBLEM Spring-05-F.3:


For each part, pick a correct frequency¹ from the list and enter its letter in the answer box²:

Write a brief explanation of your answers to receive any credit.

Frequency

- (a) If the output from an ideal C/D converter is $x[n] = A \cos(\pi n)$, and the sampling rate is 10000 samples/sec, then determine one possible value of the input frequency of $x(t)$:


ANS =

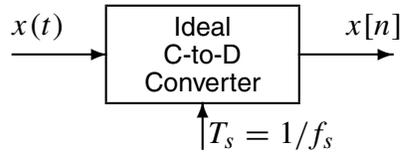

- (a) 8000 Hz
- (b) 5000 Hz
- (c) 4000 Hz
- (d) 1600 Hz
- (e) 1200 Hz
- (f) 800 Hz
- (g) 600 Hz
- (h) 500 Hz
- (i) 300 Hz

- (b) If the output from an ideal C/D converter is $x[n] = A \cos(\pi n)$, and the input signal $x(t)$ defined by: $x(t) = A \cos(3000\pi t)$ then determine one possible value of the sampling frequency of the C-to-D converter:

ANS =

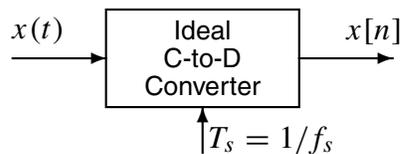


- (c) Determine the Nyquist rate for sampling the signal $x(t)$ defined by:
 $x(t) = (A - B \cos(400\pi t)) \sin(400\pi t)$.

ANS =

¹Some questions have more than one answer, but you only need to pick one correct answer from the list.

²It is possible to use an answer more than once.

PROBLEM Spring-05-F.4:

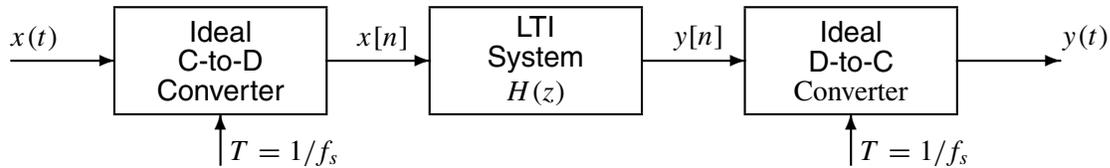

In all parts below, the sampling rates of the C-to-D and D-to-C converters **are equal to** $f_s = 60$ **samples/sec**, and the LTI system is an IIR filter with two poles at $0.8e^{\pm j2\pi/3}$, and two zeros at $e^{\pm j2\pi/3}$, i.e., the system function is $H(z) = \frac{(1 - q_1z^{-1})(1 - q_2z^{-1})}{(1 - p_1z^{-1})(1 - p_2z^{-1})}$, where $p_{1,2}$ are the poles and $q_{1,2}$ are the zeros.

(a) Determine the filter coefficients of the IIR filter and fill in the IIR difference equation below.

$$y[n] = \boxed{} y[n-1] + \boxed{} y[n-2] + \boxed{} x[n] + \boxed{} x[n-1] + \boxed{} x[n-2]$$

(b) Determine the DC response of the digital filter, i.e., the output $y[n]$ when the input is $x[n] = 1$.

(c) If the input signal is a sinusoid of the form $x(t) = \cos(2\pi f_0 t + \phi)$, and the sampling rates are $f_s = 60$ samples/sec, determine a value for the input frequency f_0 so that the output signal is zero. **Explain.**

$$f_0 = \boxed{} \text{ Hz}$$

PROBLEM Spring-05-F.5:

The diagram in Fig. 1 depicts a *cascade connection* of two linear time-invariant systems, i.e., the output of the first system is the input to the second system, and the overall output is the output of the second system.




Figure 1: Cascade connection of two discrete-time LTI systems.

Suppose that System #1 is an IIR filter described by the system function:

$$H_1(z) = \frac{2z^{-2} - 2z^{-3}}{1 + 0.5z^{-1}}$$

but System #2 is unknown.

(a) Determine whether or not System #1 is stable. Give a reason to support your answer.

(b) When the input signal $x[n]$ is a **unit-step** signal, determine the output of the first system, $y_1[n]$.


(c) When the input signal $x[n]$ is a **unit-impulse** signal, the output $y[n]$ of the overall cascaded system is:

$$y[n] = \delta[n - 3]$$

From this information, determine the system function $H_2(z)$ for the second system. **Simplify the expression for $H_2(z)$.**


PROBLEM Spring-05-F.6:

The transmitter system below involves a multiplier followed by a filter:

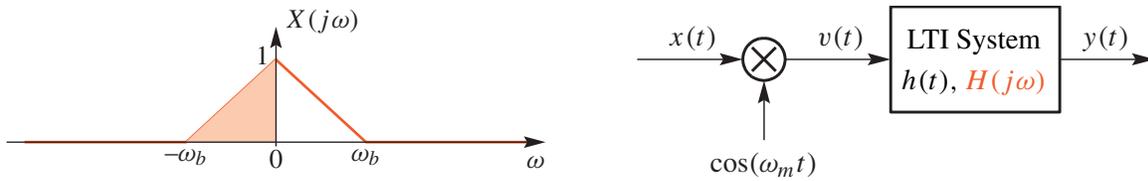


The Fourier transform of the input is $X(j\omega)$. For all parts below, assume that $\omega_m = 80\pi$, and $\omega_b = 50\pi$.

- (a) Make a sketch of $V(j\omega)$, the Fourier transform of $v(t)$, when the input is $X(j\omega)$ shown above.

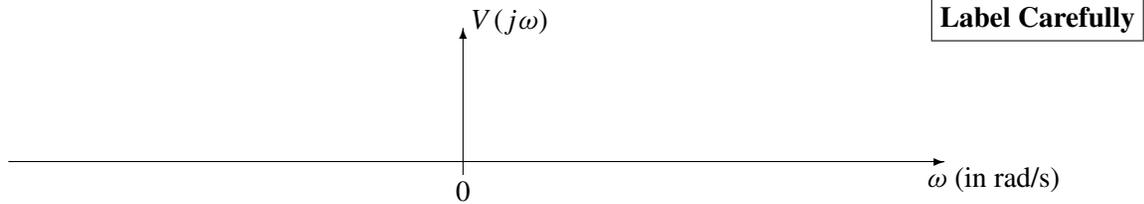

- (b) If the filter is an ideal filter defined by $H(j\omega) = \begin{cases} 0 & |\omega| > 80\pi \\ j & 0 \leq \omega \leq 80\pi \\ -j & 0 > \omega \geq -80\pi \end{cases}$

Make a sketch of $Y(j\omega)$, the Fourier transform of $y(t)$, when the input is $X(j\omega)$ shown above.

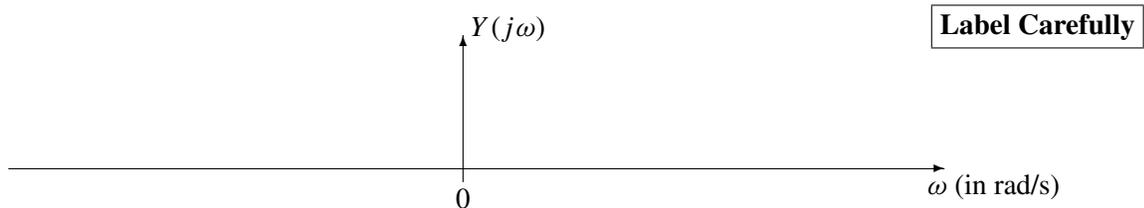

- (c) Now change the input to be $x(t) = A \cos(\omega_c t + \varphi)$. Determine the values of ω_c , φ , and A so that the output signal is $y(t) = \cos(30\pi t)$. *Note:* Use $\omega_m = 80\pi$ as above and $H(j\omega)$ from part (b).

$\omega_c =$


$\varphi =$

$A =$

PROBLEM Spring-05-F.7:

The impulse response, $h(t)$, of a continuous-time linear, time-invariant system is: $h(t) = 9\delta(t) - A\delta(t - \Delta)$

- (a) Find the output of the system, $y(t)$, when the input is $x(t) = u(t)$, $A = 9$, and $\Delta = 0.115$. Give your answer as a plot on the axes below. Label your plot carefully.

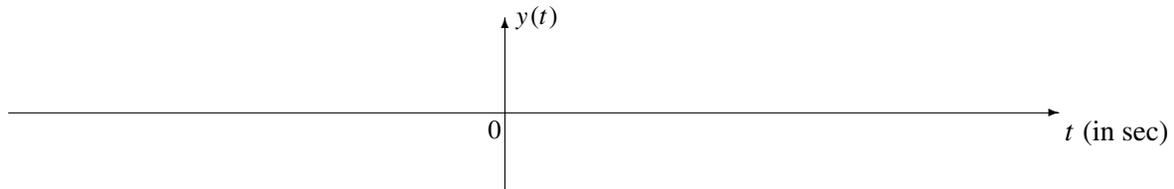

- (b) Find the output of the system, $y(t)$, when the input is $x(t) = \cos(300\pi t)$, $A = -9$, and $\Delta = 0.115$. Express your answer as a single sinusoid.

$y(t) =$

- (c) Now assume that the input signal is $x(t) = \cos(300\pi t)u(t)$, i.e., a one-sided sinusoid that is zero for $t < 0$. Find values for A and Δ that will produce an output $y(t)$ that is *exactly six periods* of a 150-Hz sinusoid, and zero thereafter.

$A =$

$\Delta =$
