


PROBLEM s-09-Q.2.1:

- (a) For the system described by the difference equation: $y[n] = x[n] + x[n-2] + 2x[n-3] + x[n-4]$, determine the output when the input is $x[n] = 25\delta[n] - 35\delta[n-1] + 15\delta[n-2]$. Give your answer as a *stem plot*.

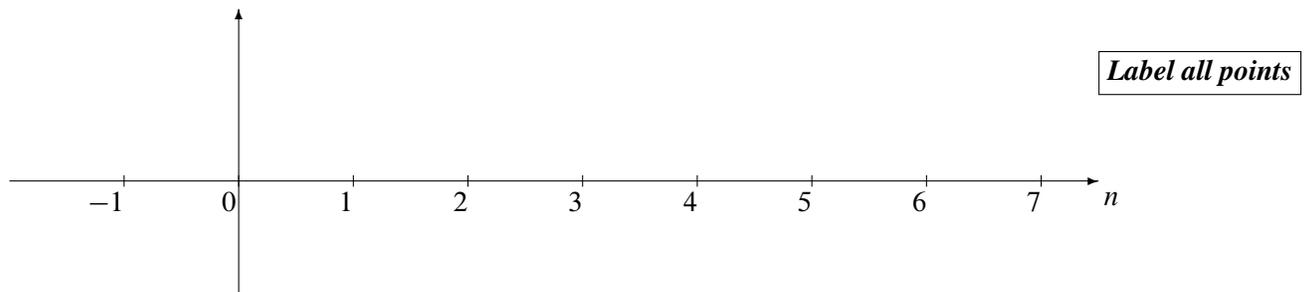

- (b) When the MATLAB command `soundsc(xx, 8000)` is used, the highest frequency that can be heard is _____ Hz.


- (c) The signal $x(t)$ is bandlimited to 25 Hz, i.e., it has no frequency components for $f > 25$ Hz. The Nyquist rate for sampling $x(t)$ is _____ samples/sec.

(d) Determine the impulse response of the FIR filter defined⁴ in MATLAB via:

```
y = firfilt( [0,pi,0,0,0,0,pi/2,0,-pi], xx );
```

Express your answer as a *sum of shifted unit-impulse signals*.


(e) Make a *stem plot* of the signal $s[n] = -99(u[n-1] - u[n-3])$, where $u[n]$ is the unit-step signal.

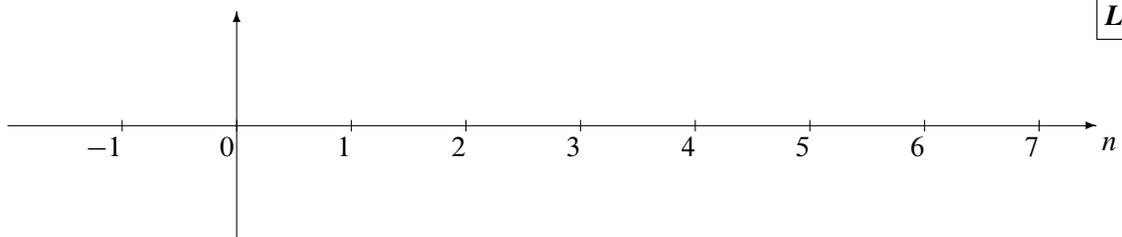

⁴In MATLAB, the functions `firfilt` and `conv` are equivalent; they produce the same result.

PROBLEM s-09-Q.2.2:

The diagram in Fig. 1 depicts a *cascade connection* of two linear time-invariant systems; i.e., the output of the first system is the input to the second system, and the overall output is the output of the second system.

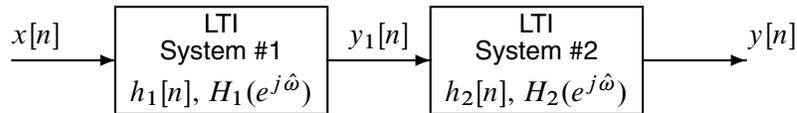

Suppose that System #1 is a filter described by its impulse response: $h_1[n] = -100\delta[n-2] + 400\delta[n-3]$

and System #2 is described by its frequency response: $H_2(e^{j\hat{\omega}}) = \frac{\sin(5\hat{\omega})}{\sin(0.5\hat{\omega})} e^{-j5.5\hat{\omega}}$

(a) Determine an expression for the frequency response, $H_1(e^{j\hat{\omega}})$, of the *first* system. No simplification is necessary.

(b) When the input to the *second* system is $y_1[n] = 120 \cos(0.2n - 0.2)$, for all n , determine the output of the *second* system, $y[n]$, over the range $-\infty < n < \infty$. *Explain your work to receive credit.*

(c) When the input to the *first* system is $x[n] = 100$, for $-\infty < n < \infty$, determine the *overall* output, $y[n]$, over the range $-\infty < n < \infty$. *Explain your work to receive credit.*

PROBLEM s-09-Q.2.3:

Two questions that involve common operations done in the Lab. Beware of folding or aliasing!

- (a) Suppose that a student enters the following MATLAB code:

```
nn = 0:2190099;  
xx = (7/pi) * cos(2*pi*0.6*nn + 2.03);  
soundsc(xx, 40000)
```

Determine the analog frequency (in Hz) that will be heard.

FREQ = Hz

- (b) Suppose that a student writes the following MATLAB code to generate a sine wave:

```
tt = 0:1/40000:1;  
xx = sin(2*pi*5000*tt+pi/3);  
soundsc(xx, fsamp);
```

Although the sinusoid was not written to have a frequency of 3000 Hz, it is possible to play out the vector `xx` so that it sounds like a 3000 Hz tone. Determine the value of `fsamp` (in Hz) that should be used to play the vector `xx` as a 3000 Hz tone. Write your answer as an integer.

fsamp = Hz

- (c) Consider the following piece of MATLAB code:

```
tt = 0:(1/8000):10;  
xx = cos(2*pi*9000*tt);  
soundsc(xx, 40000);
```

Determine the *duration (in secs)* of the final played tone.

DURATION = sec.