

GEORGIA INSTITUTE OF TECHNOLOGY  
School of Electrical and Computer Engineering

EE3230

Homework Assignment No. 0

**Date Assigned:** April 1, 1998

**Date Due:** April 3, 1998

---

**Reading Assignment:** Read pp. 7-56 and 90-116 in Oppenheim and Willsky (henceforth referred to as O&W).

---

**Homework Assignment:** You should work all of these problems to review things that were learned in EE2200 and EE2250.

---

**Problem 0.1:**


A signal composed of sinusoids is given by the equation

$$x(t) = 2 \cos(200\pi t - \pi/3) + 4 \cos(400\pi t) - 3 \cos(600\pi t + \pi/4) \quad (0.1)$$

- (a) Sketch the spectrum of this signal indicating the complex size of each frequency component. Make separate plots for real/imaginary or magnitude/phase. You may make either a one-sided or two-sided plot.
- (b) Is  $x(t)$  periodic? If so, what is the period? What is the fundamental frequency?
- (c) Now consider the signal  $y(t) = x(t) + 5 \cos(300\pi t + \pi/2)$  where  $x(t)$  is defined in Equation (1) above. How is the spectrum changed? Is  $y(t)$  periodic? If so, what is the period?
- (d) Now consider the signal  $y(t) = x(t) + 5 \cos(900t + \pi/2)$  where  $x(t)$  is defined in Equation (1) above. How is the spectrum changed? Is  $y(t)$  periodic? If so, what is the period?

**Problem 0.2:**

Consider the following system.

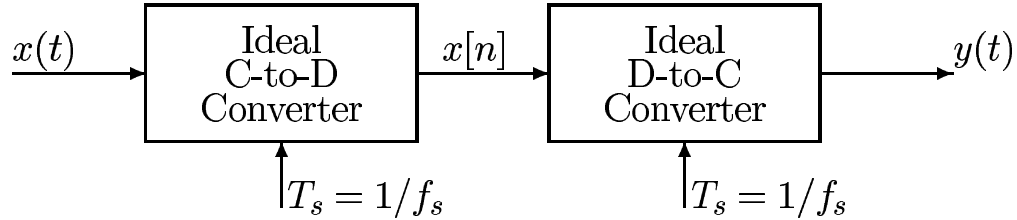

Suppose that the output of the D-to-C converter is

$$y(t) = 5 + 4 \cos(200\pi t + \pi/3)$$

when the sampling rate is  $f_s = 1/T_s = 1000$  samples/second. Determine two *different* input signals  $x(t) = x_1(t)$  and  $x(t) = x_2(t)$  that could have been the input to the C-to-D converter. Give equations for both inputs.

**Problem 0.2:**

Consider the discrete-time system defined by the  $z$ -transform system function

$$H(z) = 1 + 2z^{-1} + z^{-2}$$

- (a) Determine the difference equation that is satisfied by the input  $x[n]$  and the output  $y[n]$ .
- (b) Find the frequency response,  $H(e^{j\hat{\omega}})$ , of this system, and plot its magnitude and phase as a function of  $\hat{\omega}$  for  $-\pi < \hat{\omega} < \pi$ .
- (c) Use the frequency response determined in (a) to find the output if the input is

$$x[n] = 5 + 2 \cos(0.5\pi n)$$

**Problem 0.4:**

Consider the following circuit:

Determine the steady-state output voltage  $v_1(t)$  of this network (with  $R = 1$  ohm and  $C = 1$  farad) to the input signal

$$v_0(t) = 5 + 2 \cos(t)$$